




1 PHASE CT METERING 401-800 AMP SERVICE

2026 EDITION

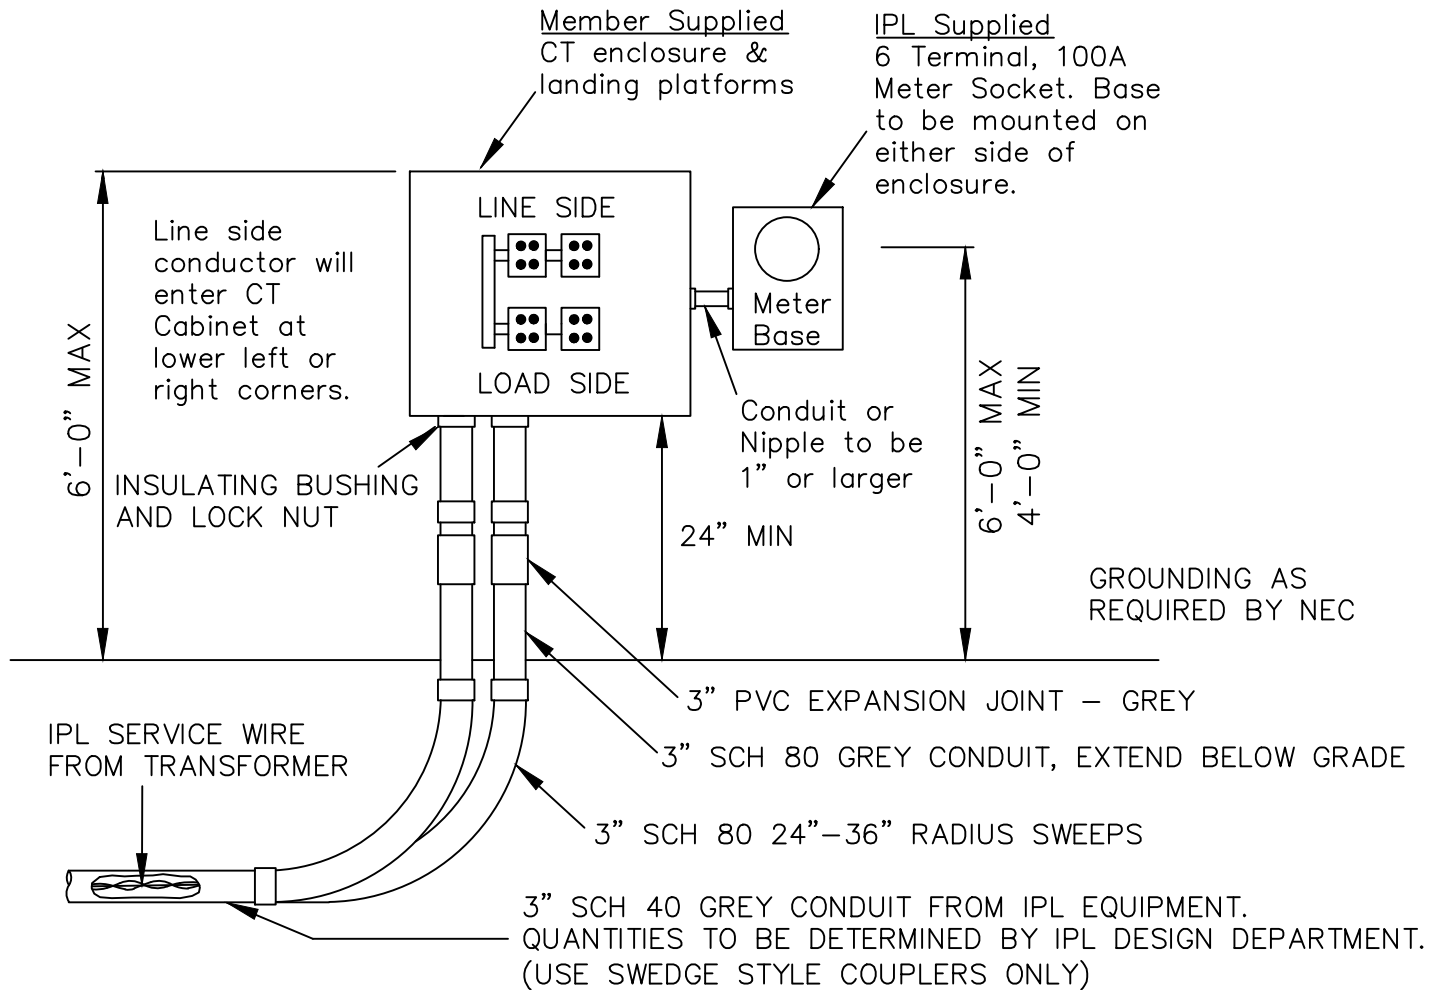

CT Enclosure

- Type 3R, ANSI 61 gray
- Removable hinged or non-hinged door(s) w/ sealing and locking provisions
- Service Ampacity: 401–800 Amps
- Cabinet WxHxD: 36x36x11 (min)

CT Landing Platforms

Part #s or Equivalent

- For bar type ANSI C12.11 CT's
- 600V, 50kA AIC
- Line & Load side Mechanical Lugs

Notes:

- 1) The member supplies and installs the current transformer enclosure and landing platform.
- 2) IPL supplies the meter base for your electrician to install.
Contact IPL for pre-wired meter base. (included in IPL charges)
IPL supplies and installs the current transformers, instrument wiring and meter.
- 3) IPL will supply, install and connect conductor to the line side only on UNDERGROUND services. The member supplies, installs and connects conductor on OVERHEAD services.