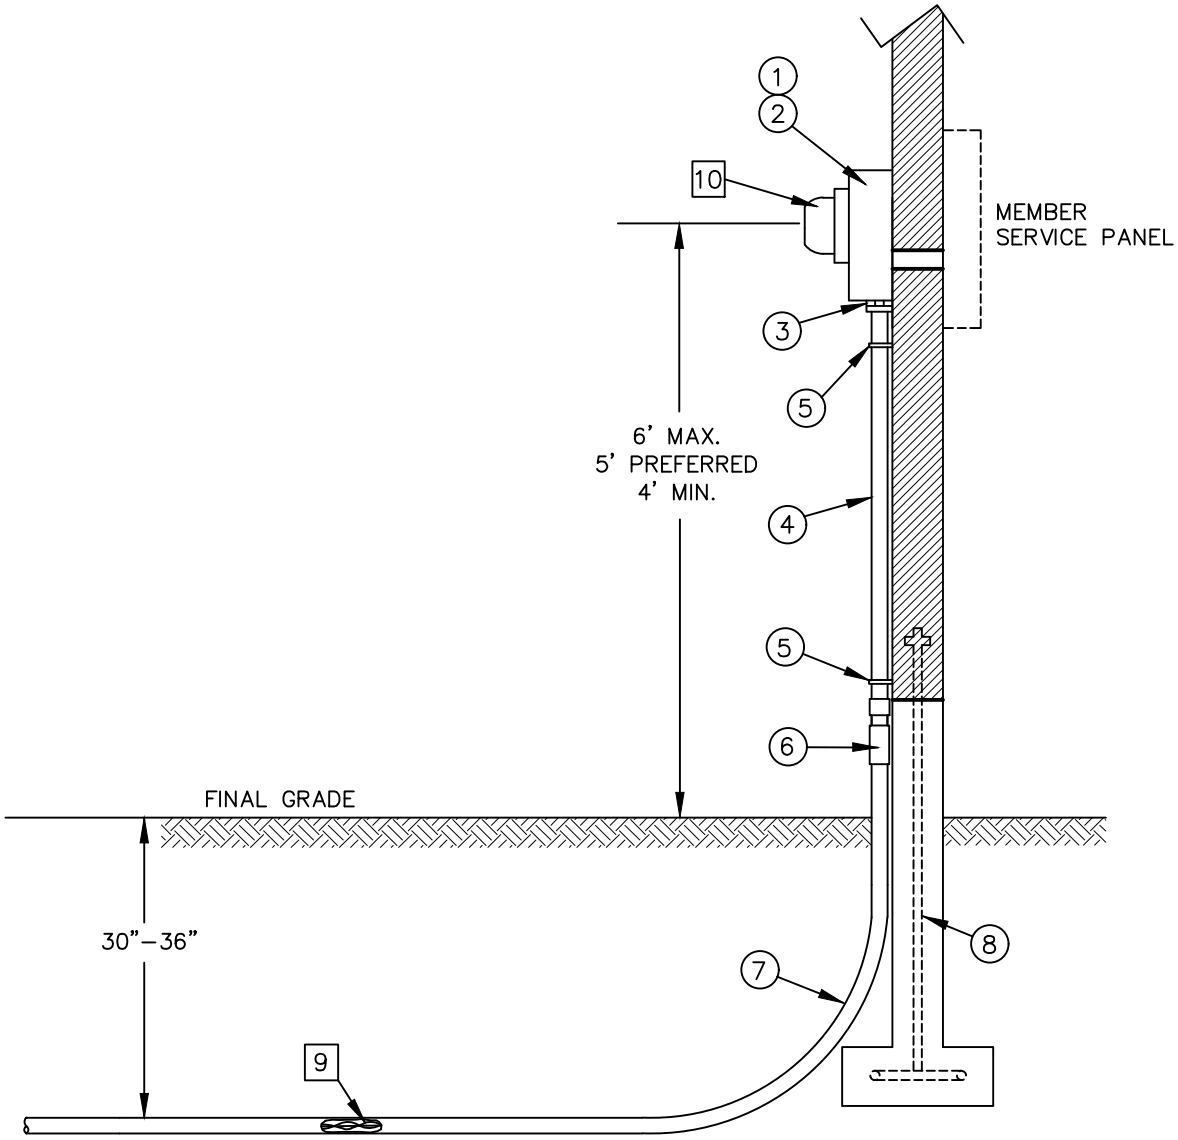

NOTES:
METER BASE AND CONDUIT MUST BE INSTALLED BEFORE UTILITY INSTALLS SERVICE LINE
METER BASE AND CONDUIT MUST BE MOUNTED ON THE OUTSIDE WALL, FLUSH MOUNT METER BASES ARE NOT ALLOWED

ITEMS INSTALLED BY THE MEMBER:

1. METER BASE CL200 OR CL320 (FOR CL320 LEVER BYPASS REQ'D)
2. SUPPLY LUGS NEED TO SUPPORT #4/0 FOR 200A & #350 FOR 400A
3. INSULATING BUSHING AND LOCKNUT (REDUCER IF REQ'D)
4. 3" SCH 80 GREY CONDUIT EXTENDING BELOW GRADE
5. CONDUIT STRAP
6. 3" PVC EXPANSION JOINT – GREY
7. 3" SCH 40 GREY CONDUIT FROM IPL EQUIPMENT, 24" RADIUS SWEEP MIN. (USE SWEDGE STYLE COUPLERS)
8. UFER GROUND AND WIRE IN ACCORDANCE WITH NEC

ITEMS INSTALLED BY THE UTILITY:

9. SERVICE WIRE FROM TRANSFORMER TO METER LOCATION
10. METER

ITEM		MATERIAL	ITEM		MATERIAL

ENGINEER:	NEW CONSTRUCTION SPECIFICATIONS PERMANENT, WALL MOUNT UNDERGROUND 0-200A and 400A SERVICE					INLAND POWER AND LIGHT CO.
REVISED	IPL DEC-11	IPL SEPT-19	IPL DEC-21			PERM UG 0-400A